


Infinidry® Holding Frame – Part no. 53215T100

Installation and assembly

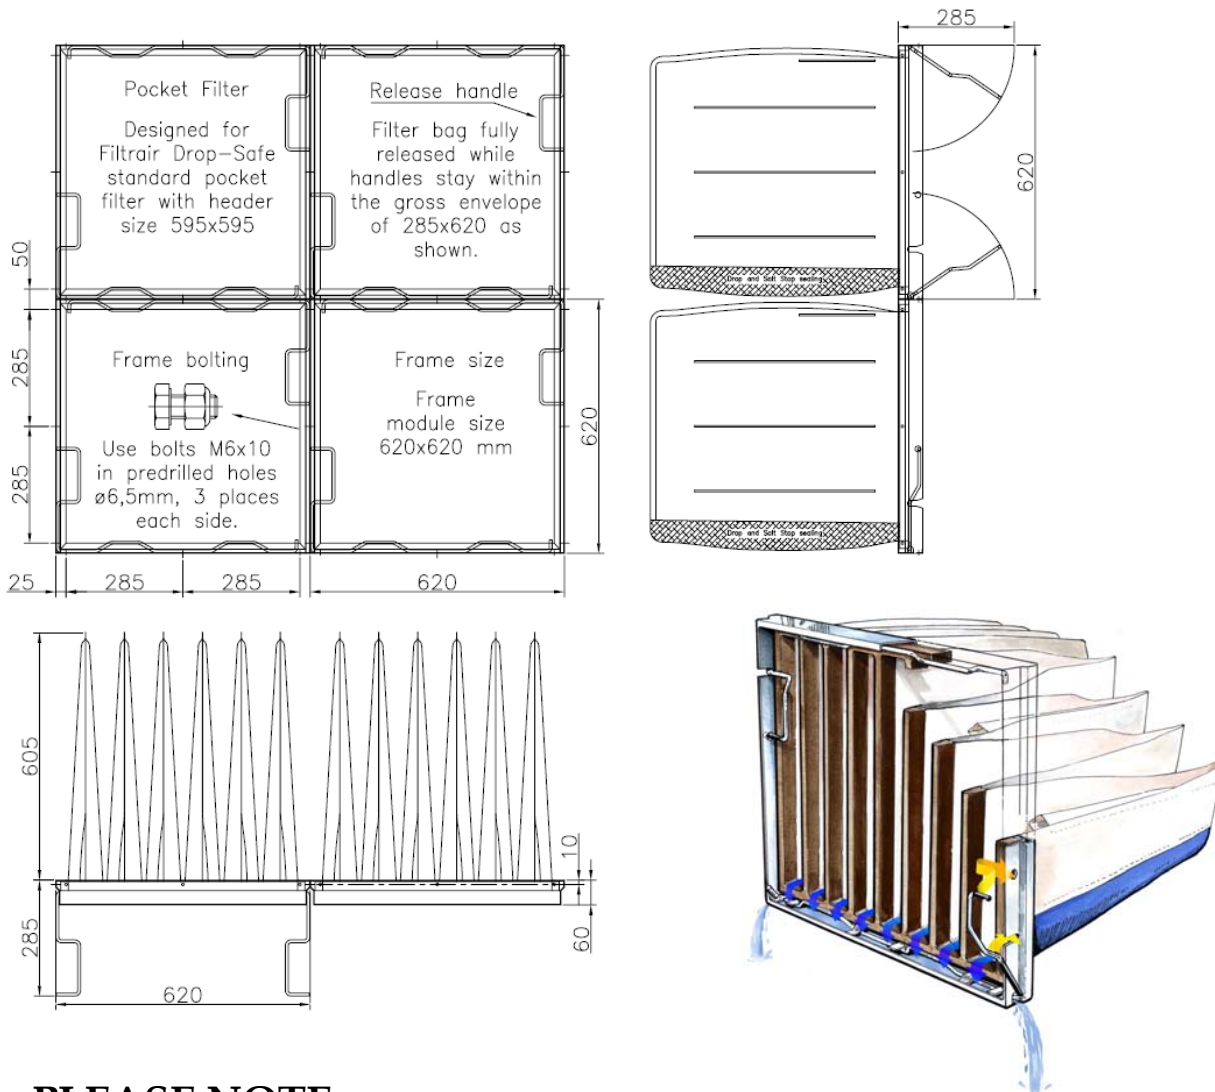

PLEASE NOTE:

- Filter frames may be assembled into filter bank multi-frame assemblies by bolting frames side-by-side.
- Frames are designed to collect and drain water from the Drop Safe barrier filters – make sure waterways are not blocked.
- Frames are drilled $\varnothing 6,5$ for bolts M6x10. Short bolts necessary to avoid conflict with filter header. These holes are also intended for bolting into filter house structure around frame assembly perimeter.
- One small bead of sealant between each frame required for water tight seal. Excess sealant may block waterways.
- For larger assemblies, a support pane must be considered based on burst pressure for each system. Support pane should be placed downstream of the frame assembly.